

AUTOMATIC PALLETIZER UNIT

Cost effective,
reliable solution for
Hi-speed pallet
loading of empty
plastic containers




CONTAINER AUTOMATION SYSTEMS

PO BOX 2850 CUMMING, GA 30028

PHONE (678)-947-5656 • FAX (678)-947-5655

www.containerautomationsystems.com

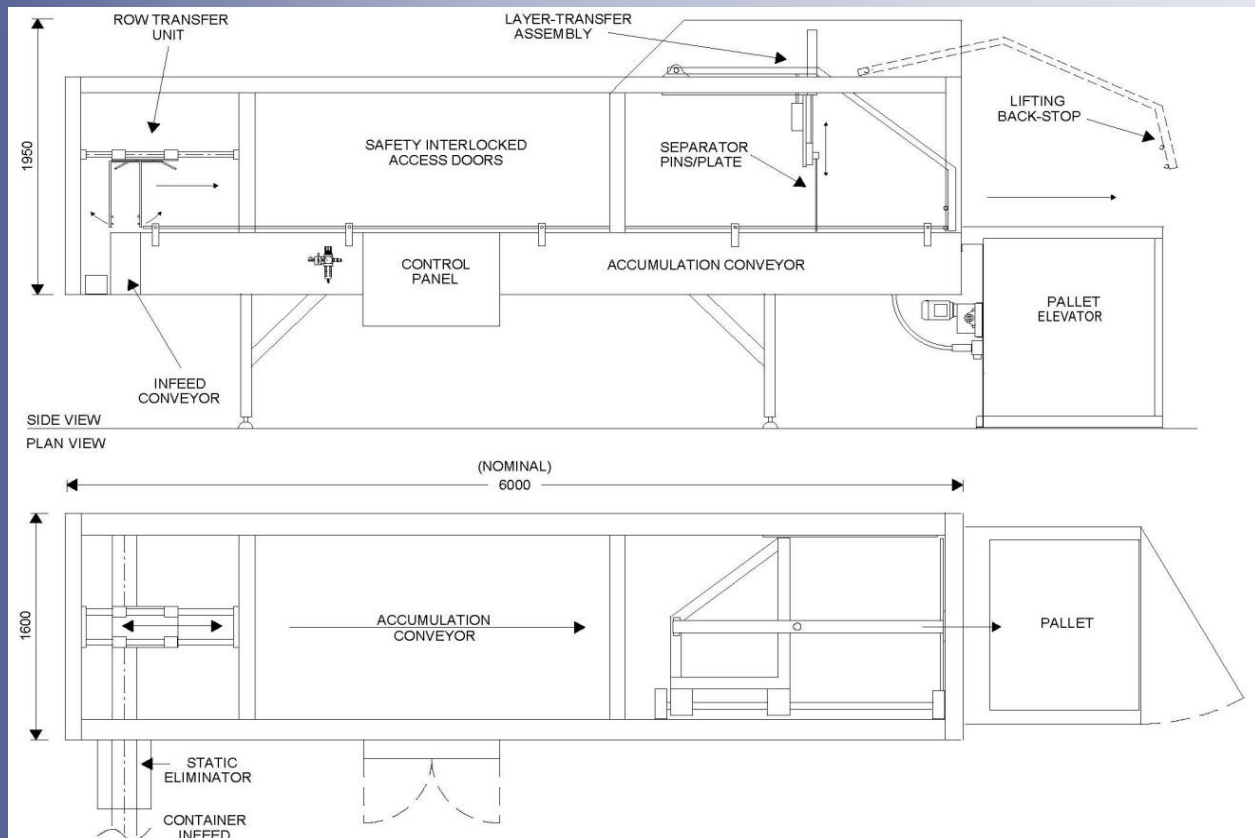

BENEFITS / FEATURES

- Minimal operator involvement (approx. 2 minutes per pallet load) to place tray, activate elevator and remove loaded pallet.
- Fully automatic control and monitoring functions with machine status indicators.
- Handles any bottle: round, square or rectangular, with quick and simple product change over.
- Capable of palletizing up to 10,000 bottles per hour.
- Modular design allows enhanced automation features to be included as required
- Compact, automatic transfer of containers onto tray, automatic leveling of pallet and trays.
- Accumulation and marshalling table, any length to suit buffer stock requirements.
- Operation with half- or full-height pallet elevator generate pallet loads up to 1400mm / 55" or 2800mm / 110" high.
- Low consumption supply requirements:
 - 3-phase 415vac 50/60hz 1kw; 0.5 CFM 90psi (6.5 bar).
 - Unit constructed to suit any pallet size / orientation.
 - All CAS equipment is covered by copyright design.

CONTAINER AUTOMATION SYSTEMS

PO BOX 2850 CUMMING, GA 30028

PHONE (678)-947-5656 • FAX (678)-947-5655

www.containerautomationsystems.com

